


TRANSPORT & WORKING



WEIGHT

33,500KG (73,800LBS)

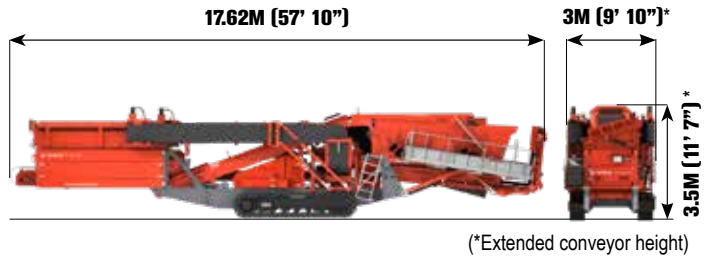

684 3-Deck

The Terex Finlay 684 is a compact easily transportable machine that offers operators rapid setup and tear down times. The screenbox features three large 4.3m x 1.7m (14' x 5' 7") inclined screens giving a large screening area of 236ft² to provide efficient screening and high capacity. The screenbox features quick wedge tensioning, access holes and bottom deck hydraulic tensioning system to reduce time required for mesh changes. All four discharge conveyors are adjustable and hydraulically fold for transport. The fourth product 'oversize plus' conveyor has variable tilt and side slew to accurately discharge material for recirculation and stockpiling.

KEY FEATURES

- ▶ Triple deck 4.3m x 1.7m (14' x 5' 7") screen with full catwalk access.
- ▶ The fourth (oversize plus) conveyor provides variable tilt and slide slew capability to accurately discharge materials for recirculation to crushers or for stockpiling.
- ▶ Maximum utilisation of three 4.3m x 1.7m (14' x 5' 7") decks provides ultra-efficient screening capabilities even at small aggregate sizes.
- ▶ A combination of quick wedge tensioning, convenient access holes and hydraulic tensioning on the bottom deck ensure mesh set up and change out times are kept to an absolute minimum.